

Basic WrapAround AC Labelling System (Model BWA)

The BWA label applying system was developed as a dedicated wrap-around labelling system. Cylindrical product can be either fed onto the main conveyor by hand, or the machine can be integrated into a modest automated packaging line.

The labelling head (UT2mAC) integrated into the BWA is mounted on a Single Axis angular adjustment accommodating labelling of tapered cylinder products.

- Versatile covering wide varieties of wrap-around label applications
- Line integrated or a stand alone system on dual lock castors
- 120mm label width wrapping capacity
- Handcrank Adjustment for Height and Angle
- Zero Maintenance AC motor

Options Available

- Clear label tracer upgrade
- Collapsible rewind
- Web break detector
- Low web detector
- 200mm roller set upgrade
- Double axis BussMount (for conical products)
- Custom wrap belts (for recessed areas and conical products)
- Upgradeable to high speed with Servo Applicator
- Print and Apply LooseLoop

Speed: Variable, 7m/min to 30m/min

Product Range: 25mm to 150mm diameter


Label Roll Diameter: 250mm maximum OD with 76mm Core

Web Width: 19mm to 120mm


Label Length: 20mm to 300+mm

Line Voltage: 120VAC, 10A, 1PH, 60Hz

Electrical Protection Rating: NEMA 12 (IP 55)

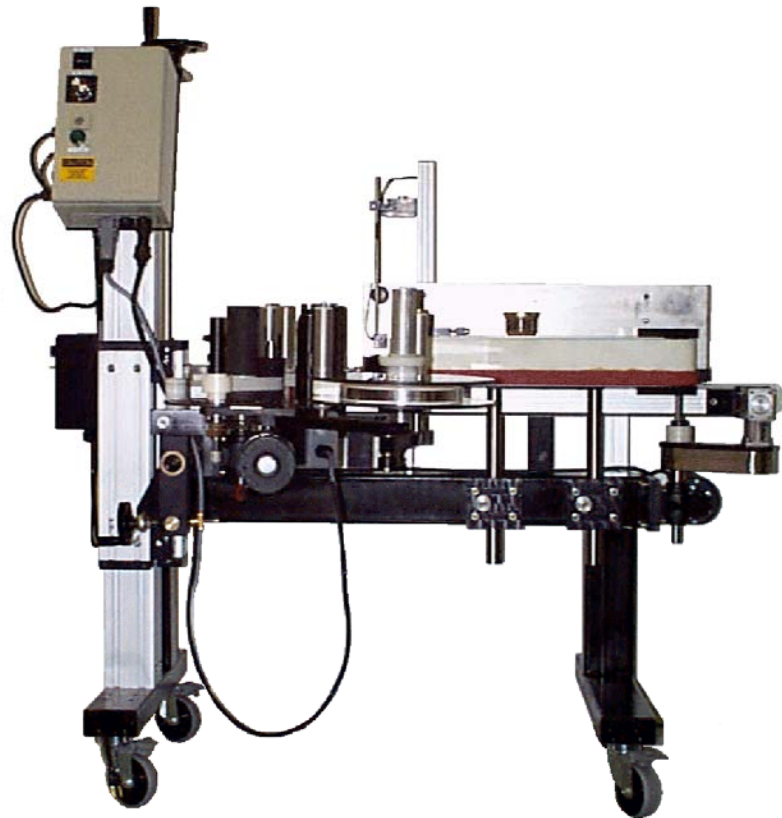

Allow us to learn more about your specific labelling needs by calling 1-888-250-1524 or send an e-mail inquiry to sales@labelling.com.

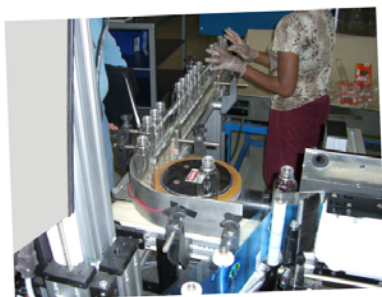

1435 Bonhill Rd Units 31-32 • Mississauga, ON L5T 1V2 • CANADA

Tel: (905)564-2794 • Fax: (905)564-2793 • sales@labelling.com

